

TANA SHARK

Waste shredders



Unique versatility

TANA
From Waste to Value®

TANA Shark Waste shredders

THE MOST VERSATILE WASTE SHREDDER ON THE MARKET

Applicable even for the most challenging materials



Recycling possibilities

- Energy recovery
- Re-use of waste fractions
- Recovery of valuable materials
- Final disposal of rejected waste
- SRF/RDF production

Demand smart machinery

- Detailed reports and real-time information of the processes efficiency enable better control on increasing the profitability

Possibilities in recycling business

- Many waste materials require a tailored, task specific recycling processes
- Cost reduction for enhancing current processes
- Avoiding unnecessary pre-sorting of waste
- Varying uses of end products require a variety of particle sizes
- Solutions needed for difficult materials eg. plastics, tyres,
- Increased quality standards for energy recovery and other re-use possibilities

More value through versatility

For many years the recycling business has seen shredders that are designed for very specific, narrow field of tasks and applications.

The requirements and processes are constantly changing and the needs for different types of materials and end products vary from waste-to-energy production to volume reduction, from pre-treatment to raw material production.

These gave the key guidelines when we designed the TANA Shark. It is a slow-speed multipurpose waste shredder suitable for performing different tasks with the efficiency, reliability and quality only Tana can provide.

Prepared for future possibilities

Choosing a right shredder for the needs of today may mean that you limit your possibilities in the future. Most slow speed shredders are at their best when doing certain kind of shredding or are applicable for shredding of certain kinds of materials only.

By choosing the TANA Shark a variety of possibilities is still available. It can be used in

- Pre-shredding
- Secondary shredding
- Small particle size shredding in one pass
- In in-line systems

And it can shred a wide variety of materials, such as tyres, commercial & industrial waste construction & demolition waste, Solid Recovered Fuel (SRF), plastics, MSW, Waste wood, railway sleepers, household waste, mattresses and furniture, paper, shingles, ragger wire and other special materials



Meeting the high demands of waste management

WASTE TO ENERGY

EU produces 12,000 metric kilotons of SRF annually (Germany 6,150 kt/a)

Source: European Recovered Fuel Organisation

Total of 20% of electricity demand in the US must originate from renewable sources (ie. SRF, RDF) by the year 2020

Source: American Clean Energy and Security Act

MATERIAL RECOVERY

**Percentage of tyres recycled:
Canada 95%, Europe 84%, Australia 23%**

Source: URS & World Business Council for Sustainable Development

**Tyre Derived Aggregate (TDA) applications are constantly being developed:
TDA drains 10 times better than soil, insulates 8 times better than stone**

TANA

From Waste to Value®

Recycling rates are increasing globally and new possibilities for using waste as resource are being born every year.

In many countries, legislation aims at reducing and preventing the disposal of waste to landfills. Waste to Energy, recycling and other alternative ways of waste handling mean new processes and create a need for a variety of machinery and equipment, in other words new business opportunities in the recycling industry.

Because the business environment is constantly changing, versatility of machines is a value. It leaves the window open for grasping new business opportunities without necessarily investing in another machine.

Tana's slogan "From Waste to Value" crystallizes our mission: to provide our customers a possibility to make more money.



Recycling end-of-life -tyres: Capacity increased with TANA Shark 440

“One of the key issues to purchase the TANA Shark 440DT was the fact that the machine is able to shred not only tyres but also plastic waste, plastic rolls, mattresses and MSW.”

- Kari Soini, L&T Finland Ltd

Read more customer stories at tana.fi


Smart operation

EASY USER INTERFACE

TANA Control System (TCS) monitors and controls the machine functions. There are 12 pre-programmed operating programs for different types of materials and purposes of shredding. On top of that, extra customer specified programs can be added

The programs adjust the machine functions to optimal level for achieving the wanted output. For instance, overcharge pressure limits, rotor RPMs and conveyor speed can be adjusted.

If a non-crushable object blocks the rotor, TCS makes the machine reverse and try a few times until the object either goes through or the machine stops. The non-crushable object can be removed quickly and safely through the opening side wall.

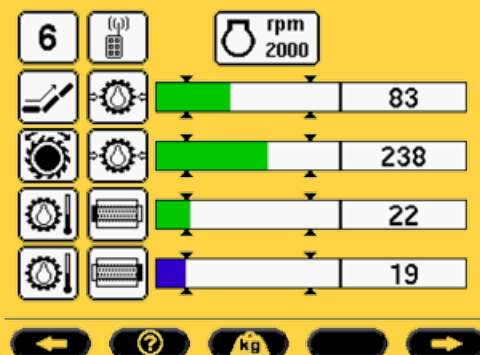

Integrated scale tracks production


For better control of your shredding operation, TANA Shark weighs the shredded materials on the conveyor in real time. The information is transferred to TANA ProTrack®, where you can view reports by waste fractions.

You can also evaluate operators by comparing the quantities they have shredded during a certain time period like a work shift.

Increasing the operator efficiency by “learning by doing” -principle needs feedback, which the reports from the scale can produce.

REPORT 2015-01-01 00:00 – 2015-01-31 23:59

Totals:		831
Total hours		344.1
Working hours		207.13
Idle hours		136.97
Idle hour % of total hours		40 %
Fuel consumption litres		13999
Avg. fuel consumption litres/h		40.39
Avg. load percent when working		61.16

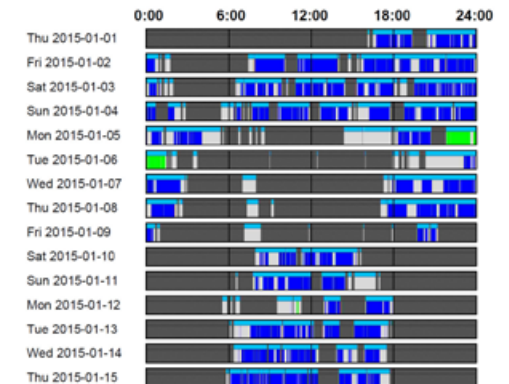

Replacing two shredders with one TANA Shark Minimal dust in waste wood shredding

“The ergonomics and safety of the TANA Shark 440D is years ahead compared to the previous machines we have used. For example changing knives and/or screen is not only safe but also a really quick procedure to do due to the marvelous design of the machine..”


Operations Manager from a French company

Read more customer stories at tana.fi

TANA PROTRACK® PREVENTS DOWNTIMES


TANA Shark has inbuilt smart features called TANA ProTrack®. It enables an Internet access and a real time view to the machine for authorized professionals at TANA Service Center, at the local Tana representative as well as at the customer himself.

It improves accuracy of trouble-shooting and minimizes downtimes. In a best case scenario, upcoming failures can be prevented by reacting to the early symptoms and data.

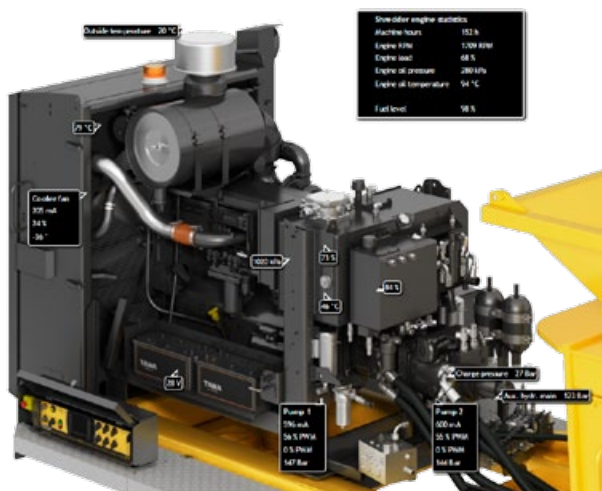

The machine owner can track his machine where and whenever he wants. This allows more control of the operation. In addition to the real time view, the upcoming scheduled maintenances, fuel consumption and working hours can be downloaded - just to mention a few.

If the reporting (optional) has been ordered, it is possible to track the work shifts and the efficiencies of the operators of the machine.

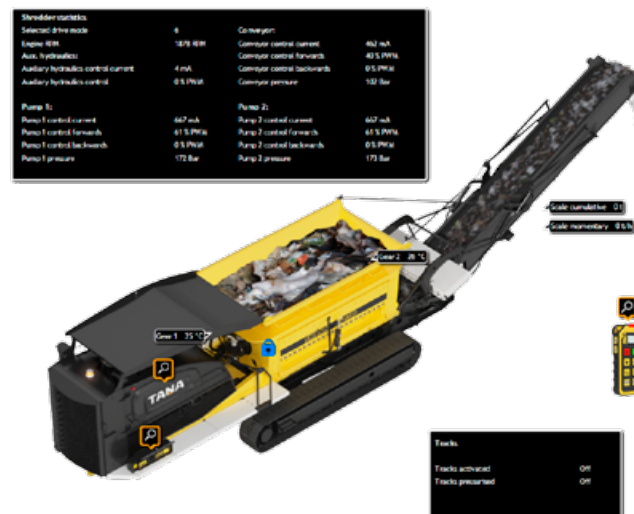

TANA Service Kits

The filters and accessories needed for the scheduled maintenances are packed in TANA Service Kits. When it is time for scheduled maintenance, everything except lubricants are provided in one box ready to go.



TANA Shark

SIMPLE, ROBUST AND SMART

Maximized reliability

Renowned for designing long lasting, robust machines, Tana engineering aims at the best customer experience through durability and high uptime.

TANA Shark has a hydrostatic power transmission, identical to the one used in TANA landfill compactors. It introduces a patented *swing frame construction.

The robustness of the Shark is shown in its weight. The material of the wearing parts, such as the rotor knives, is an alloy developed specifically for the TANA Shark.

Easy to operate and maintain


One of the smart features for daily operation is the opening sidewall. It provides an easy and safe access to clean and remove non-shreddable objects from the rotor shaft.

Opening sidewall also functions as a service hatch when changing or replacing rotor knives and counter knives.

Both rotor knives and counter knives have two wearing surfaces which prolong their lifetime.

Adjusting end product size with counter knives

For volume reduction and pre-shredding purposes up to two thirds of the counter knives can be replaced with half knives which result in bigger end product size and higher capacity. Using rotor screens allows to finetune the homogeneity of the small particle size.

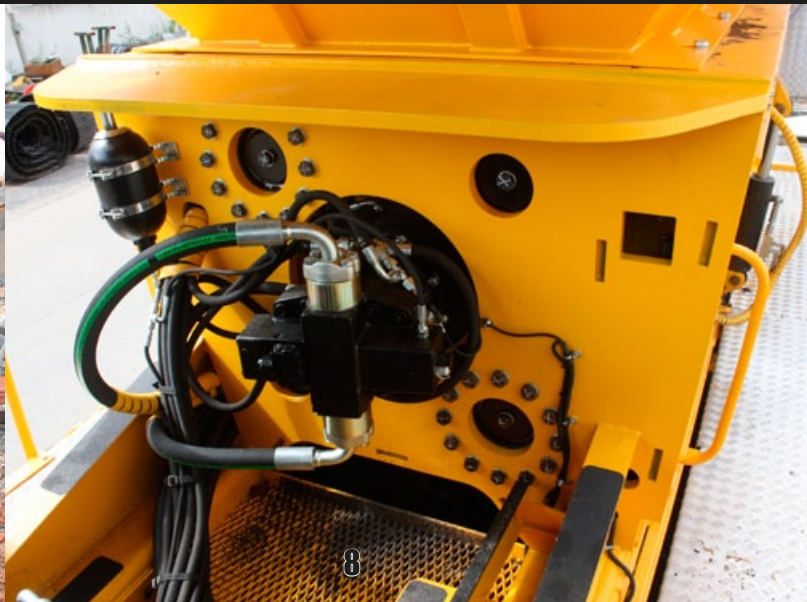

*The swing frame construction (pat.) by TANA protects the gearbox, thus increasing reliability and maximizing uptime of the machine.





Producing SRF
High uptimes with long, stringy materials

“Our two TANA Sharks provide outstanding quality SRF with the high uptime of 99% even when working on difficult materials which normally jam the conventional shredders.”

Kalle Mäki, Ekopartnerit

Read more customer stories at tana.fi

PRODUCE ANYTHING FROM 50 TO 500 MM PARTICLE SIZE



Screens for fine tuning the end product

The end product size and quality can be determined and finalized by using a rotor screen with suitable mesh size out of the five available. The suitable size is defined by the characteristics of the material and the wanted end product size.




Adjustable rotor to screen clearance

The rotor to screen clearance can be narrowed down to one millimeter. The optimal clearance depends on the material and the mesh size of the screen.

ERGONOMIC ACCESS TO THE SERVICE POINTS

Daily routines can be performed easily with a walk around area around the power pack. FOPS gives shelter from rain and extensive sunlight. Easy access to service points is not only ergonomic but it also diminishes the time needed for routine service operations.

The pre-screening of the airflow to the radiators and an oversized engine air filter greatly reduce the daily service attention required.

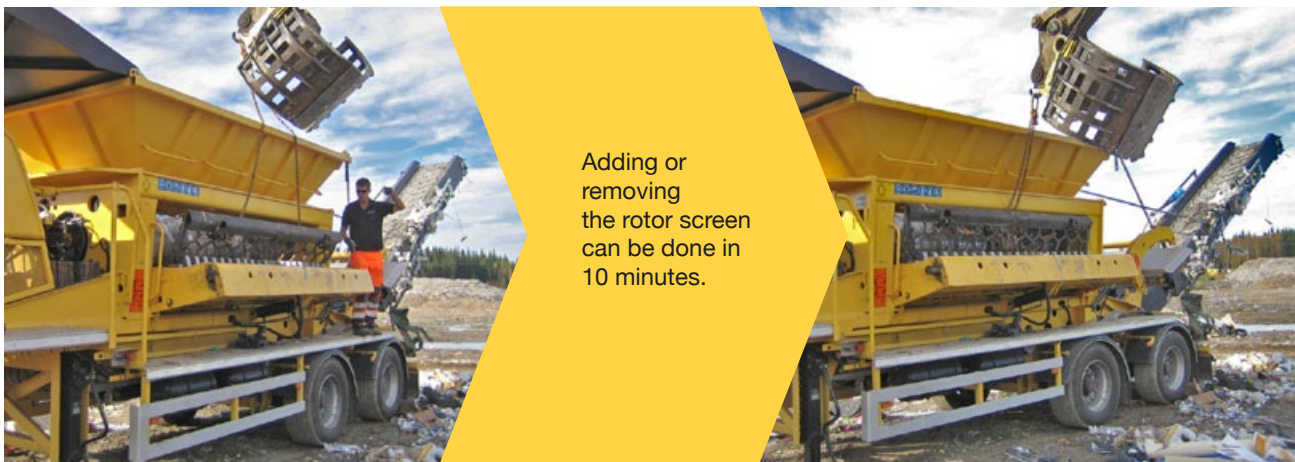

Adding or removing the rotor screen can be done in 10 minutes.

Universal knives

Same knife for any material. The rotor configuration and knife design result in a half cutting effect, that allows the TANA Shark crush practically any solid waste fraction.

Due to the bolt-on attachment mechanism of the knives, all rotor knives can be changed in a few hours.



TANA Shark

ONE TANA SHARK CAN REPLACE EVEN THREE DIFFERENT MACHINES

Many tasks can be performed with one machine instead of one pre-shredder, primary shredder and a screen

Operating one machine instead of two or three cuts costs on fuel and labour significantly

Highly homogeneous end product in one pass

Traditional waste shredding



ing process	<div data-bbox="365 268 768 400"> <h1>TANA</h1> <p>From Waste to Value®</p> </div>		Smart waste shredding process with TANA Shark	
Costs	Particle size and waste streams		Costs	
Fuel and manpower needed			Fuel and manpower needed	
<div data-bbox="107 571 145 619">€</div> <div data-bbox="168 691 219 770"></div> <div data-bbox="0 691 33 770"></div>	Construction & demolition wood (C&D)	<div data-bbox="499 675 638 699">200-500 mm</div> <div data-bbox="790 635 813 778">Green waste</div>	<div data-bbox="947 571 985 619">€</div> <div data-bbox="913 691 965 770"></div> <div data-bbox="1037 691 1070 770"></div>	
<div data-bbox="107 794 145 842">€</div> <div data-bbox="141 874 241 994"></div> <div data-bbox="0 914 56 994"></div>		<div data-bbox="499 898 638 922">100-200 mm</div> <div data-bbox="678 882 701 1233">Municipal Solid Waste (MSW)</div> <div data-bbox="745 810 779 1010">Commercial & Industrial waste</div> <div data-bbox="745 810 779 1010">Railway sleepers</div>	<div data-bbox="947 794 985 842">€</div> <div data-bbox="891 914 992 994"></div> <div data-bbox="1037 914 1070 994"></div>	
<div data-bbox="107 1018 145 1066">€</div> <div data-bbox="118 1106 275 1225"></div> <div data-bbox="0 1137 78 1217"></div>		<div data-bbox="499 1121 638 1145">50-100 mm</div> <div data-bbox="365 1177 387 1233">Tires</div> <div data-bbox="398 1034 421 1233">Plastic & Textiles</div> <div data-bbox="432 914 465 1233">SRF (Solid Recovered Fuel)</div> <div data-bbox="678 882 701 1233">Municipal Solid Waste (MSW)</div> <div data-bbox="712 882 745 1233">Commercial & Industrial waste</div>	<div data-bbox="947 1018 985 1066">€</div> <div data-bbox="891 1106 992 1225"></div> <div data-bbox="1037 1137 1070 1217"></div>	
<div data-bbox="107 1241 145 1289">€</div> <div data-bbox="96 1297 297 1457"></div> <div data-bbox="0 1361 78 1441"></div>		<div data-bbox="521 1353 611 1377"><50 mm</div>	<div data-bbox="947 1241 985 1289">€</div> <div data-bbox="857 1297 1014 1457"></div> <div data-bbox="1037 1361 1070 1441"></div>	

FROM LANDFILLS TO

The founding year of Tana Oy

The first purpose-built real landfill compactor with two full-width steel drums



Swing frame (pat.)
for reliability and serviceability for TANA Compactors: later implemented on the TANA Shark waste shredders



The first TANA Shark
mobile slow speed shredder R5030 launched

1971

2001

2003

2005

20



State-of-the-art TANA Control System **TCS**



Gearing towards recycling business
Prototypes of the first TANA Shark slow speed shredder R1300

International launch of the TANA Shark slow speed shredder unique in versatility. Two basic product lines S5430 and S6330




06

2008

2012

2014

2015

Reporting
per waste
fraction

REPORT
2015-01-01 00:00 - 2015-01-31 23:59

Time	Type	Value
0:00	A1	100
0:00	A2	100
0:00	A3	100
0:00	A4	100
0:00	A5	100
0:00	A6	100
0:00	A7	100
0:00	A8	100
0:00	A9	100
0:00	A10	100
0:00	A11	100
0:00	A12	100
0:00	A13	100
0:00	A14	100
0:00	A15	100
0:00	A16	100
0:00	A17	100
0:00	A18	100
0:00	A19	100
0:00	A20	100
0:00	A21	100
0:00	A22	100
0:00	A23	100
0:00	A24	100
0:00	A25	100
0:00	A26	100
0:00	A27	100
0:00	A28	100
0:00	A29	100
0:00	A30	100
0:00	A31	100
0:00	A32	100
0:00	A33	100
0:00	A34	100
0:00	A35	100
0:00	A36	100
0:00	A37	100
0:00	A38	100
0:00	A39	100
0:00	A40	100
0:00	A41	100
0:00	A42	100
0:00	A43	100
0:00	A44	100
0:00	A45	100
0:00	A46	100
0:00	A47	100
0:00	A48	100
0:00	A49	100
0:00	A50	100
0:00	A51	100
0:00	A52	100
0:00	A53	100
0:00	A54	100
0:00	A55	100
0:00	A56	100
0:00	A57	100
0:00	A58	100
0:00	A59	100
0:00	A60	100
0:00	A61	100
0:00	A62	100
0:00	A63	100
0:00	A64	100
0:00	A65	100
0:00	A66	100
0:00	A67	100
0:00	A68	100
0:00	A69	100
0:00	A70	100
0:00	A71	100
0:00	A72	100
0:00	A73	100
0:00	A74	100
0:00	A75	100
0:00	A76	100
0:00	A77	100
0:00	A78	100
0:00	A79	100
0:00	A80	100
0:00	A81	100
0:00	A82	100
0:00	A83	100
0:00	A84	100
0:00	A85	100
0:00	A86	100
0:00	A87	100
0:00	A88	100
0:00	A89	100
0:00	A90	100
0:00	A91	100
0:00	A92	100
0:00	A93	100
0:00	A94	100
0:00	A95	100
0:00	A96	100
0:00	A97	100
0:00	A98	100
0:00	A99	100
0:00	A100	




The second generation
of TANA ProTrack®
for customer value
measurement standard
in all models

The screenshot shows the 'Weather' application interface. At the top, there are icons for weather conditions (cloud, sun, moon) and a 'Weather' label. Below these are three horizontal sliders for 'Temperature', 'Humidity', and 'Wind Speed'. The 'Temperature' slider is set to 20, 'Humidity' to 50, and 'Wind Speed' to 10. To the right of the sliders are three vertical sliders for 'Brightness', 'Contrast', and 'Saturation', all set to 100. At the bottom, there are five circular buttons labeled '1' through '5'.



Product lines with Tier 4 final engines

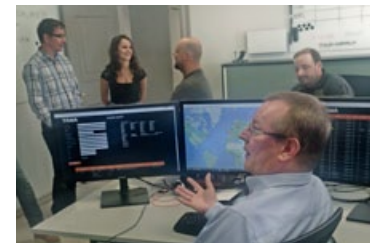

TANA Service Center launch

Technical specifications

General information	220D 220D ^{eco}	220DT 220DT ^{eco}	220E	440D 440D ^{eco}	440DT 440DT ^{eco}	440E
Operating weight, kg *)	24040	25740	21500	27100	28800	21500
Total length in transportation, mm	10530	10530	10020	10530	10530	10020
Total length in operation, mm	15790	15760		15790	15760	
Total width, mm	2520	2830	2860	2520	2830	2860
Total height in transportation, mm	3880	3390	3260	3880	3390	3260
Rotor shaft type	single	single	single	single	single	single
Conveyor belt speed (max. m/s)	3	3	3	3	3	3
Conveyor width	1000	1000	1000	1000	1000	1000
Conveyor length (m)	12,5	12,5	12,5	12,5	12,5	12,5
Conveyor height on operation	4030	3600	3600	4030	3730	3600
Integrated scale	x	x	x	x	x	x
Remote control	x	x	x	x	x	x
Maximum velocity (models with tracks)		3 km/h			3 km/h	
Overband magnet power rating (Gs/cm²)	8000	8000	8000	8000	8000	8000
Engine and power transmission	220D 220D ^{eco}	220DT / 220DT ^{eco}	220E	440D / 440D ^{eco}	440DT / 440DT ^{eco}	440E
Engine	Cummins QSX15 (220D) Cummins QSX15 (220Deco) Fullfills U.S. EPA Tier 4 final, CARB Tier 4 final and EU Stage IV	Cummins QSX15 (220DT) Cummins QSX15 (220DTeco) - Fullfills U.S. EPA Tier 4 final, CARB Tier 4 final and EU Stage IV	VEM	Cummins QSX15 (440D) Cummins QSX15 (440Deco) - Fullfills U.S. EPA Tier 4 final, CARB Tier 4 final and EU Stage IV	Cummins QSX15 (440DT) Cummins QSX15 (440DTeco) - Fullfills U.S. EPA Tier 4 final, CARB Tier 4 final and EU Stage IV	VEM
Power rating (SAE J1995) (kW)	439 (220D) 433 (220Deco)	439 (220DT) 433 (220DTeco)	2 x 110kW	439 (440D) 433 (440Deco)	439 (440DT) 433 (440DTeco)	2 x 160KW
Displacement (l)	15	15	-	15	15	-
No. of cylinders	6	6	-	6	6	-
Emission limits	TIER 3 (stage IIIA) (220D) TIER 4F (220Deco)	TIER 3 (stage IIIA) (220DT) TIER 4F (220DTeco)	IE3	TIER 3 (stage IIIA) (440D) TIER 4F (440Deco)	TIER 3 (stage IIIA) (440DT) TIER 4F (440DTeco)	IE3
Fuel tank (litres)	700	710	-	700	710	-
Urea tank (eco-models only)	56	56	-	56	56	-
Rotor drive gears, brand	Lohmann + Stolterfoht	Lohmann + Stolterfoht	Lohmann + Stolterfoht	Lohmann + Stolterfoht	Lohmann + Stolterfoht	Lohmann + Stolterfoht
Rotor drive gears, pcs	2	2	2	2	2	2
Nominal rotor torque, kNm	220	220	220	440	440	440
Shredding tools	220D / 220D ^{eco}	220DT / 220DT ^{eco}	220E	440D / 440D ^{eco}	440DT / 440DT ^{eco}	440E
Rotor shredding length, mm	3000	3000	3000	3000	3000	3000
Rotor speed, rpm	27	27	27	28	28	28
Rotor diameter, mm	870	870	920	920	920	920
Rotor knives, pcs	22	22	33	33	33	33
Counter knives, pcs	23	23	23	23	23	23
Rotor knife type	Bolt-on, reversible cutting knife	Bolt-on, reversible cutting knife	Bolt-on, reversible cutting knife	Bolt-on, reversible cutting knife	Bolt-on, reversible cutting knife	Bolt-on, reversible cutting knife
Rotor knife size	115x70	115x70	115x70	115x70	115x70	115x70
Optional equipment						
Overband magnet	Overband magnet	Overband magnet	Overband magnet	Overband magnet	Overband magnet	Overband magnet
Rotor screen width x length (optional)	3050x850	3050x850	3050x900	3050x900	3050x900	3050x900
Rotor screen sizes (optional) (mm)	103,157, 205, 258	103, 157, 205, 258	109, 167, 220, 275	109, 167, 220, 275	109, 167, 220, 275	109, 167, 220, 275

*) Operating weight includes the basic machine (fuel tank full), overband magnet, screen support bars and one screen.

Weights and measurements are given within normal tolerances limits. The manufacturer reserves the right for any changes. See the latest updates for the TANA Shark waste shredders at www.tana.fi. Latest print June 2015

DIESEL DRIVEN MODELS **MOBILE WASTE SHREDDERS** **ON SEMI-TRAILER**

TANA Shark 220D / 220D^{eco}
TANA Shark 440D / 440D^{eco}



DIESEL DRIVEN MODELS **MOBILE WASTE SHREDDERS** **ON TRACKS**

TANA Shark 220DT / 220DT^{eco}
TANA Shark 440DT / 440DT^{eco}



ELECTRIC MODELS **STATIONARY** **WASTE SHREDDERS**

TANA Shark 220E
TANA Shark 440E






TANA Service Center

Machine reliability and uptime are our customers' key concerns and hence ours, too. We build maximum machine uptime and have our eyes on all the Tana machines around the world through TANA Service Center.

Together with our distributors we are aiming at preventative maintenance by following early signals of possible malfunctions and getting in touch with the customer to solve the situation before any problems occur.

The purpose is to improve the response time and quality to our customers by helping them to keep the productivity high. Your Tana dealer, along with TANA Service Center, is ready to assist you with any possible situations to ensure high efficiency at minimum operating costs.

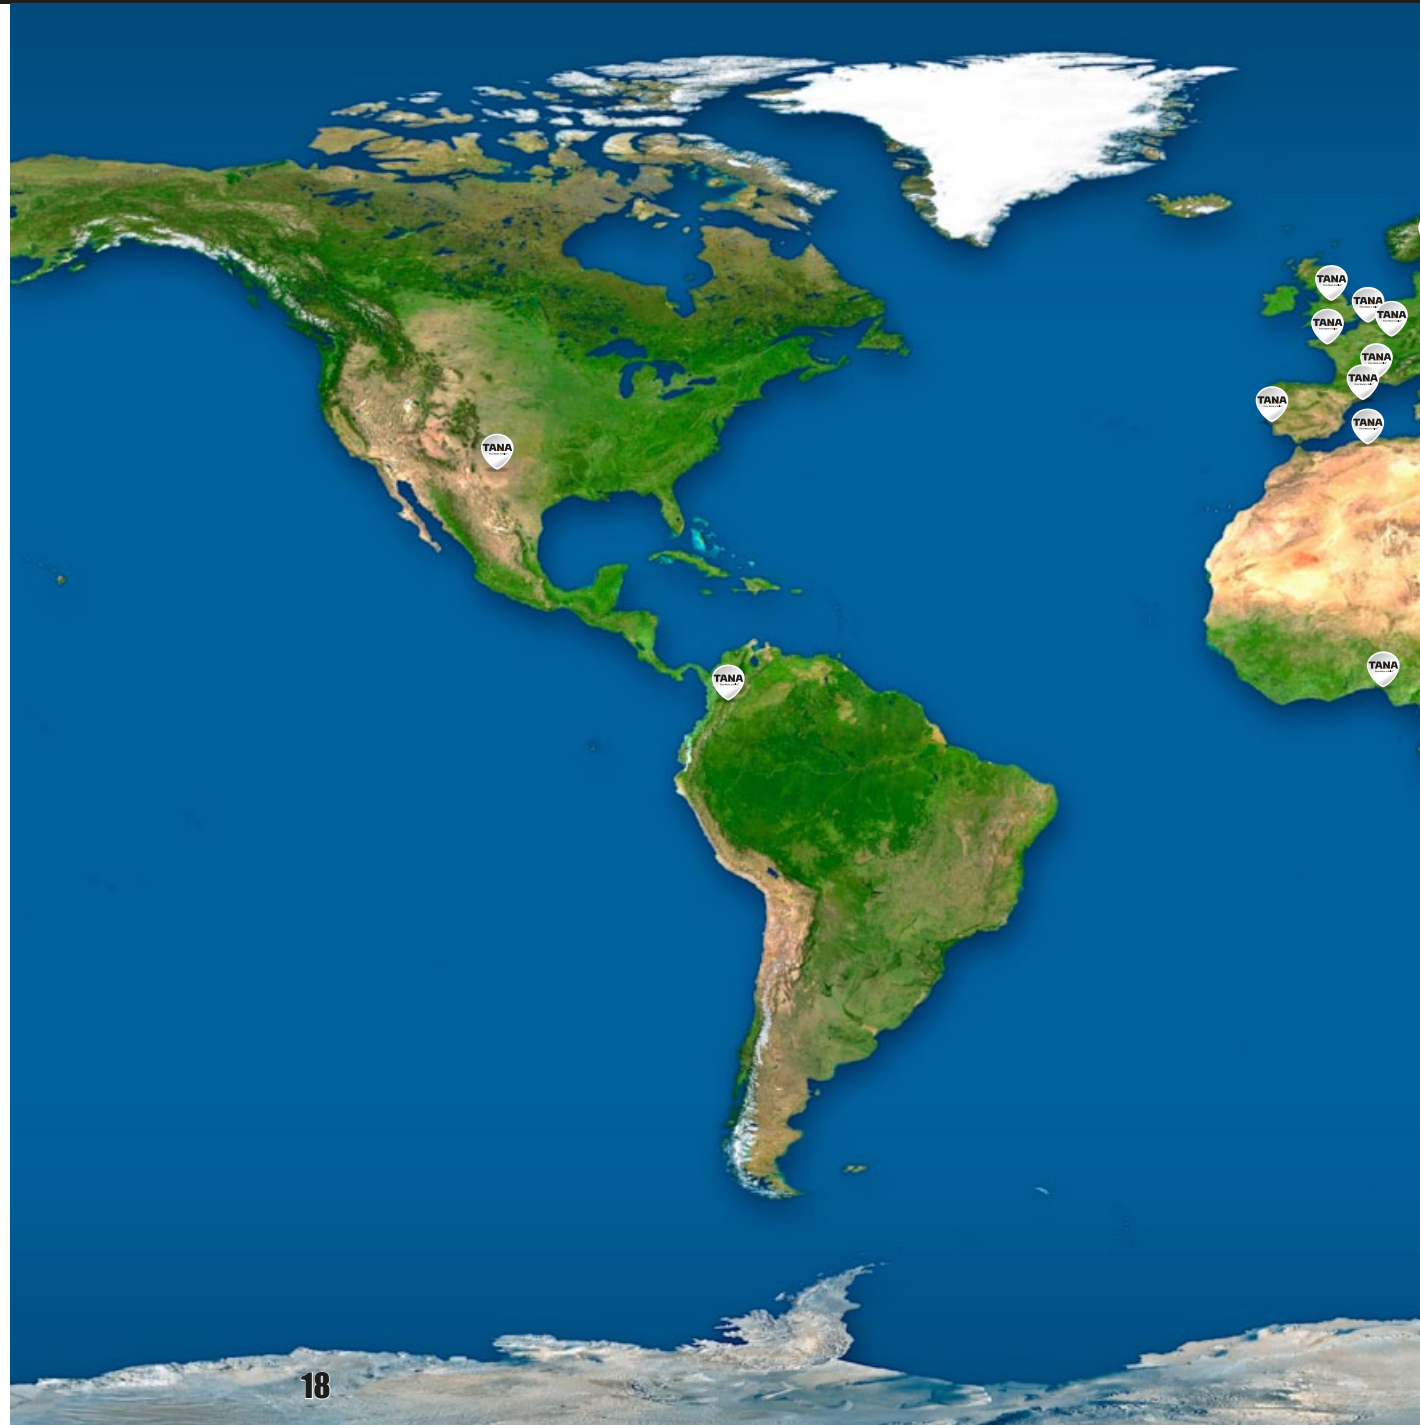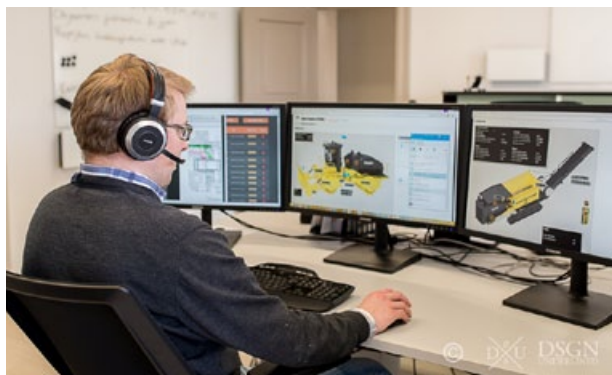

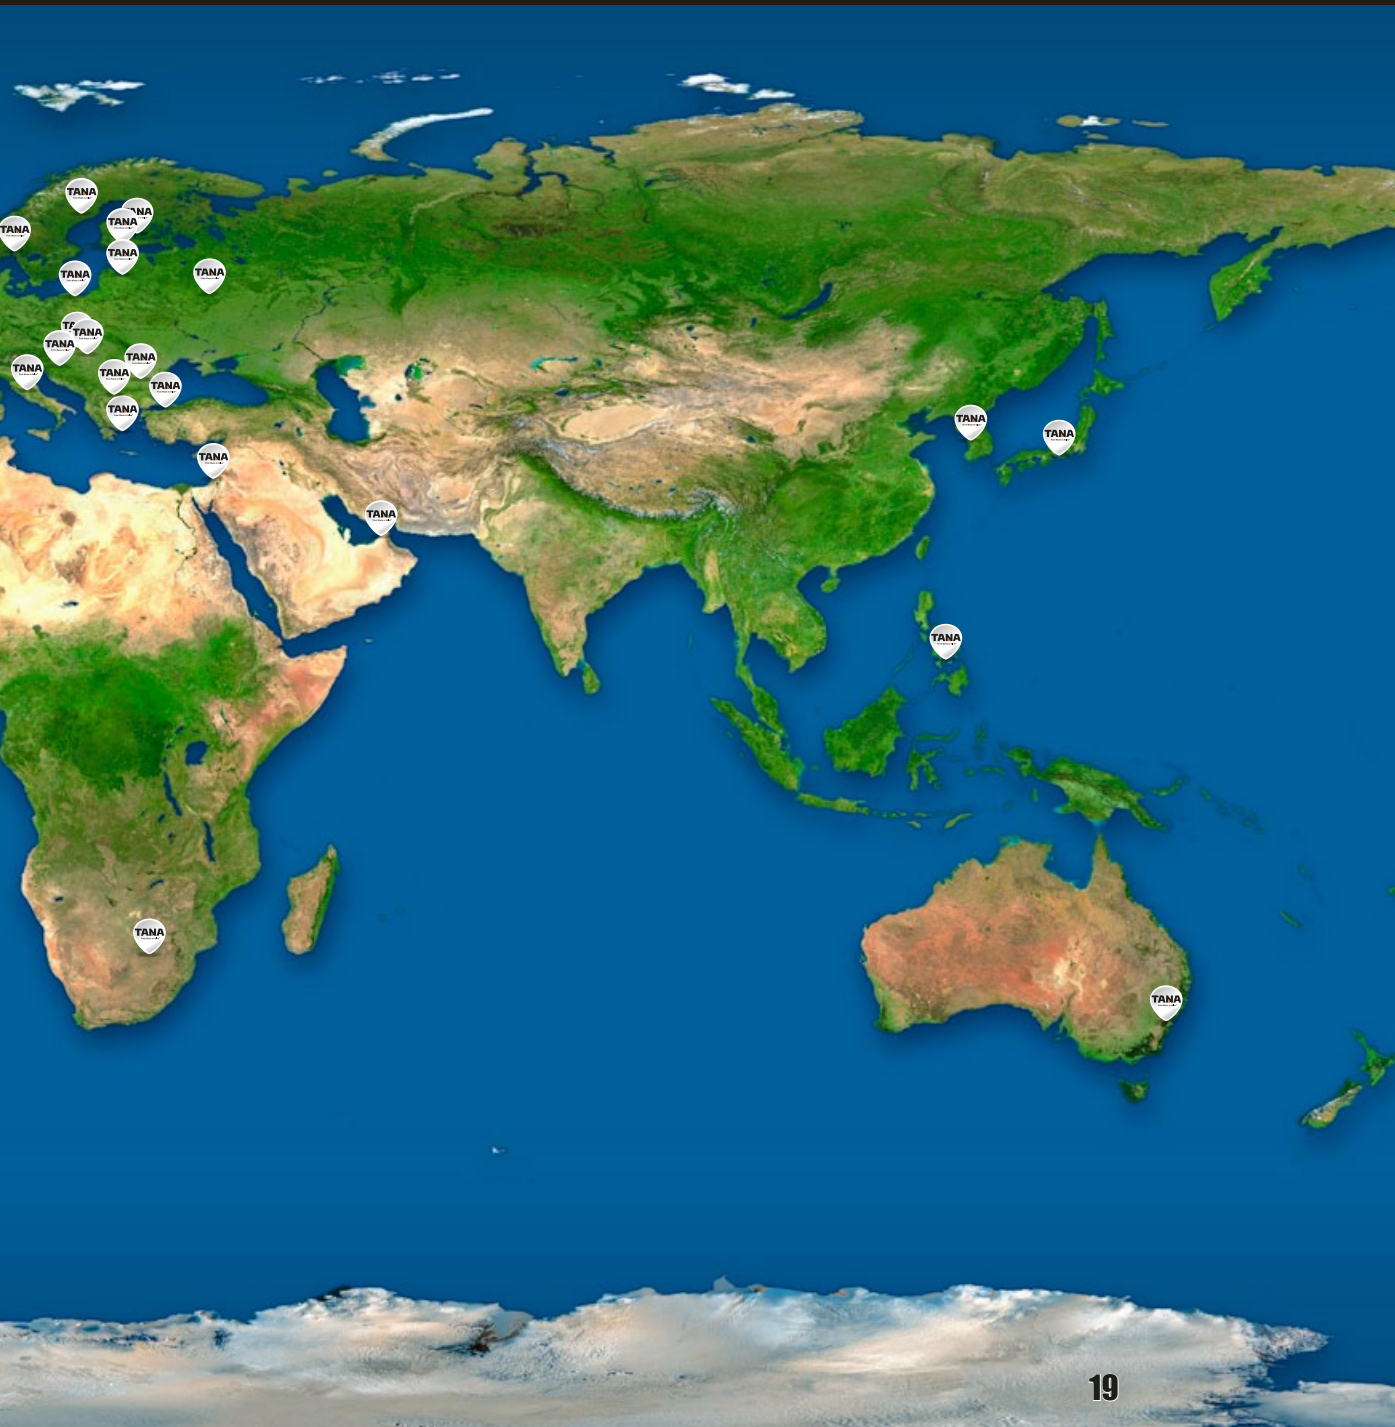

Future with us

At Tana we want to help our customers to improve their businesses and increase their profits. Our slogan, **From Waste to Value**, crystallizes that.

Over 40 years of experience in waste business along with the world's first landfill compactor, Tana has continued to manufacture and develop the most versatile waste shredders since 2006.

Our customers have grown accustomed to receiving the best possible shredding performance and reliability from TANA Shark waste shredders.

Global distribution and service network is at your service, along with TANA Service Center, providing our customers the top notch service and parts for keeping your Tana machinery up and running with peak efficiency.

These are key elements for the highly demanding tasks required by the recycling operations around the globe.

TANA

From Waste to Value[®]



TANA
From Waste to Value®

Tana Oy
P.O.Box 160, Schaumanin puistotie 1
FI-40101 Jyväskylä, FINLAND
Tel. +358 20 7290 240, fax +358 20 7290 261
mail@tana.fi • www.tana.fi

Your local TANA distributor:

Latest print June 2015